

Titano LED Bollard Range

Bollards



Data Sheet

Product Information

The Titano LED Bollard Range is a versatile bollard range supplied in 3000k or 5000K to suit your application. Available in Anthracite, Stainless Steel/Wood and Stainless Steel finishes

Low energy Alternative to traditional bollard light sources suitable for Domestic or Commercial Applications

Product Features

- 2 year warranty
- Class I
- IK08
- IP43 on wall Bollard/IP65 for bollards
- 10w 3000K or 4000K LED
- CRI: Ra90
- Up to 940lumens delivered
- L70-50,000hrs



KSR3500 SS



KSR3502 ANTH



KSR3504 SS/W



KSR3506 SS

Product Specification

Product Code	Product Description	Wattage (W)	CCT (k)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class	Protection Class
KSR3500	Titano 10w 4000K LED Wall Bollard	10	4000	940	90	G	I
KSR3501	Titano 10w 3000K LED Wall Bollard	10	3000	890	90	G	I
KSR3502	Titano 10w 4000K LED 450mm Bollard	10	4000	940	90	G	I
KSR3503	Titano 10w 3000K LED 450mm Bollard	10	3000	890	90	G	I
KSR3504	Titano 10w 4000K LED 750mm Bollard	10	4000	940	90	G	I
KSR3505	Titano 10w 3000K LED 750mm Bollard	10	3000	890	90	G	I
KSR3506	Titano 10w 4000K LED 1000mm Bollard	10	4000	940	90	G	I
KSR3507	Titano 10w 3000K LED 1000mm Bollard	10	3000	890	90	G	I
Accessories							
KSR3180	Titano Root Mounting Kit						

Nominal voltage	220~240VAC
Operating frequency	50-60Hz
Circuit Wattage	12w including losses
Circuit Current	TBC
Driver Current Rating	N/A Mains Voltage LED
PFC	0.9
In Rush Current	N/A
Temperature Range	-20°c to 40°c
IP rating	43 for wall light and 65 for Bollards

Construction

Body:	Die Cast Aluminium or AISI 3016L Stainless Steel (SS only)
Lens:	Transparent Polycarbonate

Standards


BSEN60598-1:2021	Luminaires – Part 1: General requirements and tests
------------------	---

In Conformity with


LVD	Low voltage directive 2014/35/EU
EMC	Electromagnetic compatibility directive 2014/30/EU
ERP	Energy related products directive 2019/2020/EU
RoHS	Restriction of hazardous substances 2015/863/EU

Product Dimensions


KSR3500/01

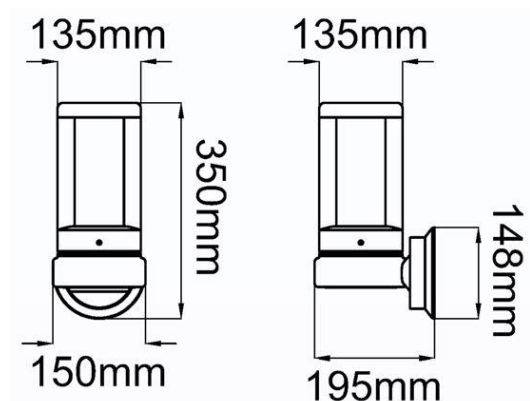


KSR3502/03

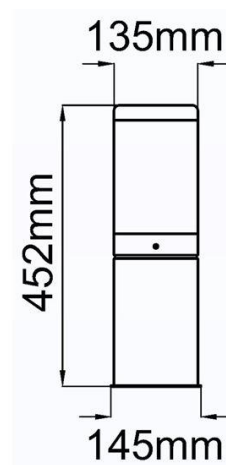

KSR3504/05

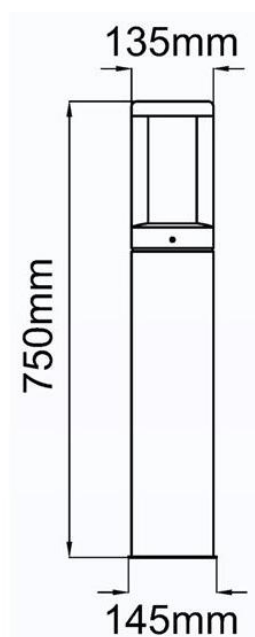

KSR3506/07

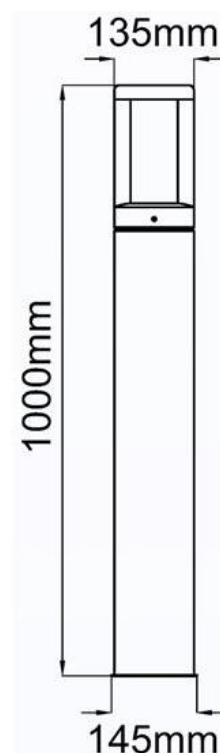

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.