

Villas

Exterior Recessed Lighting



Data Sheet

Product Information

The Villas LED recessed ground/wall lights are ideal for Wall Washing, feature, and marker lighting applications.

With 4 cover options to choose from this Wall wash light provides versatility and flexibility to the Installer.

Product Features

- 2 year warranty
- Class I
- IP65
- 4000K LED
- CRI: Ra80
- Can be wall or ground recessed
- Comes with eyelid single output cover as standard with optional 2 way, 4 way or 8 way cover available to order
- L70 – 25,000hrs



KSR1365

Product Specification

| Product Code | Product Description | Wattage (W) | CCT (K) | Lumens (lm) | CRI (Ra) | Protection Class |
|--------------|---|-------------|---------|-------------|----------|------------------|
| KSR1365 | Villas 5W LED Eyelid Ground/Wall Light Anthracite | 5 | 4000 | 45 | 80 | I |
| KSR1366 | Villas 2 Way Cover Only | N/A | 4000 | 89 | 80 | N/A |
| KSR1367 | Villas 4 Way Cover Only | N/A | 4000 | 65 | 80 | N/A |
| KSR1368 | Villas 8 Way Cover Only | N/A | 4000 | 86 | 80 | N/A |

| | |
|---------------------------|----------------------------|
| Nominal voltage | 24VDC |
| Operating frequency | N/A |
| Circuit Wattage | 5.1w (Typical consumption) |
| Circuit Current | 0.04A |
| Driver Current rating | 200mA |
| PFC | 0.55 |
| In Rush Current | 0.859A Max Peak @ 0~40ms |
| Ambient temperature range | -10°C~+35°C |
| Start time | < 0.5 sec |
| IP rating | 65 |

Construction

| | |
|--------|--------------------|
| Body: | Die Cast Aluminium |
| Cover: | Die Cast Aluminium |
| Lens: | Glass |

Standards


BSEN60598-1:2021 Luminaires – Part 1: General requirements and tests

In Conformity with


| | |
|------|--|
| LVD | Low voltage directive 2014/35/EU |
| EMC | Electromagnetic compatibility directive 2014/30/EU |
| ERP | Energy related products directive 2019/2020/EU |
| RoHS | Restriction of hazardous substances 2015/863/EU |

Product Dimensions


91-97mm

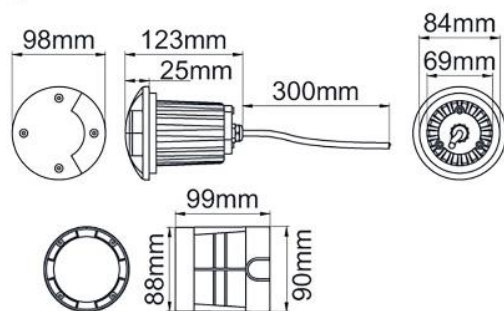


KSR1365



KSR1366



KSR1367



KSR1368

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.