# Installation Sheet KSRDL102

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintainence.

# IP20 □ 砦 ( € 👍 (]0.5m 🖡 240V 50W Max

These Fittings are Class II: Double insulated, No Earth required.

#### **Important Information**

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply. Any faulty, broken or damaged luminaires should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

## Important User Advice

Always switch off mains supply before installing, lamp changes or servicing. This luminaire is suitable for indoor use only and should not be fitted to damp or wet surfaces such as freshly plastered or painted ceilings.

At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.


## **Installation Details**

Cut a round hole in ceiling and ensure adequate minimum ceiling void without infringing on joists, water pipes or electrical cables. Connect this product to a mains 240V 50Hz supply.

Fit this product as per the illustration shown in (Fig 1). Do not fit onto new plaster or damp areas.

This appliance will be considered Class II, the cabling from connector to lampholder has two thickness of insulation.


Fig. I Fig. I Geiling



\*Ensure there is adequate free air ventilation around fitting. The nearest illuminated surface must be at least 0.5m distance from the front of the fitting.



Twist & Lock ( ) Recessed Tiltable Downlight Available finishes:- White, Chrome & Satin Chrome

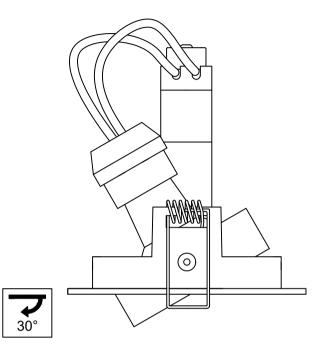

	ØRim Size	ØCut out	Void Depth Req'd	Max Wattage / Lamp Type
KSRDL102	95mm	82mm	135mm	GU10 - 50W

Lamp Details Lamp Cap: GU10 Max Wattage: 50W KSR Lighting recommend only branded lamps For example: Sylvania, GE, Philips or Osram

> KSR Lighting Aftersales: 023 92 674343 E-mail: aftersales@ksrlighting.com