

Installation Sheet KSR8200-03

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP20     75W Max

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply.
Any faulty, broken or damaged luminaires should be replaced immediately.
KSR will not accept responsibility for any claims arising from a poor installation.
Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature (normal operating ambient temperature -15°C - +40°C), humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice

Always switch off mains supply before servicing.
Do not use Megger or similar high voltage instruments. Due to the fact this luminaire contains electronic components that maybe damaged by high test voltages, they must be disconnected from the circuit before testing. To prevent damage to the driver, do not mix with conventional magnetic ballasts on the same electrical circuit. At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.


Installation Procedure


KSR recommends that a sample hole is cut in some scrap material to familiarise yourself with the installation.
Once you are completely satisfied:
Locate the area's suitable to install these luminaires.
Cut a hole in the ceiling using the table opposite and ensure you have sufficient ceiling void without infringing on joists, water pipes or electrical cables.
Connect this product to the mains supply using the driver supplied only (Brown - Live and Blue - Neutral).
Fit body into aperture and fix using supplied clips, it may be necessary to tilt the lamps aside to secure the fixing clips.
Fit this product as per illustration shown in Fig. 1
Ensure there is adequate free air ventilation around the fitting.
75mm all round and 25mm above.
Adjust lamp direction.
Turn on the mains supply to test the luminaire.

Chieti AR111 Retail Display Boxes

Available Finish: Silver Trim, Black Inner baffle

Fig. 1

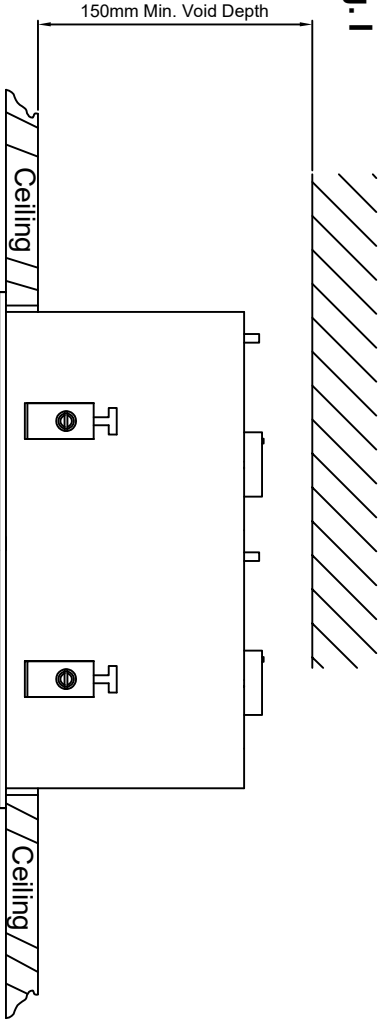

	Box Size	ØCut out 	Void Depth Required	Beam Angle	Dimmable	Lumens
KSR8200	189mm x 189mm	170mm x 170mm	150mm	60°	No	Dependant on Lamp
KSR8201	342mm x 189mm	323mm x 165mm	150mm	60°	No	Dependant on Lamp
KSR8202	498mm x 189mm	480mm x 165mm	150mm	60°	No	Dependant on Lamp
KSR8203	347mm x 347mm	325mm x 325mm	150mm	60°	No	Dependant on Lamp



Lamp Details
Lamp Type: AR111
Wattage: Max 75W Per lamp
Lumens: Varies depending on lamp(s)



KSR Lighting Aftersales: 023 92 674343
E-mail: aftersales@ksrlighting.com