

Installation Sheet

KSR6534-6535

Escala Pro

46W LED Adjustable Beam Angle Track Fitting

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP20 ⚡⏚ ⚡⏚ UK CA € 240VAC~50Hz 46W

Important Information

It is recommended that the track system is installed and fitted by a qualified electrician ensuring the installation complies to current IEE wiring regulations & local building control. These products are designed for use with the Escala Pro single circuit track system only. Any damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a sub-standard installation.


Important User Advice

Always switch off mains supply before installing or servicing. This product is designed to be used indoors only.

Installation Procedure

Familiarize yourself with the way the luminaire attaches to the track and ensuring the correct polarity. KSR recommend to insert the luminaire into track with the locking tab opposite the Live side (shown by the line on the track) then turn the luminaire clockwise until the locking tab locks into the track, never force the luminaire see Fig. 1. Visual confirmation that the luminaire is located correctly is that the arrows on the locking tab should point towards the Live side of the track (shown by the line on the track) see Fig.2. Make sure the locking tab is located in the locked position. Adjust the fitting to the desired position, the head section will tilt and rotate, do not force the adjustment past the stopping point. Rotate the front face of the luminaire between 20° and 50° as required for the application.

Available Finishes: White or Black

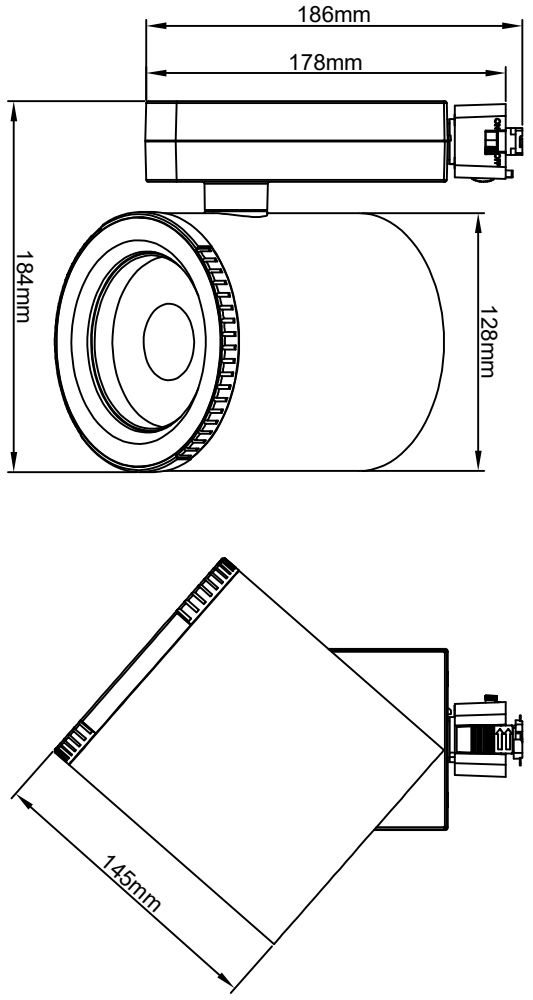

KSR6534/KSR6535

Fig. 1


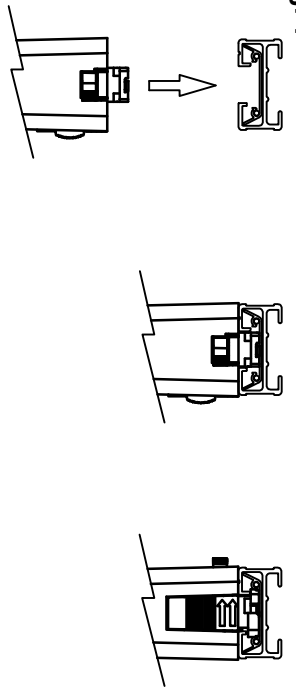


Fig. 2



Lamp Details			
Product Code	Wattage	CCT	Lumens
KSR6534	46W	3000K	3800
KSR6535	46W	4000K	4050
CRI Ra:			
>90			
>90			

The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced

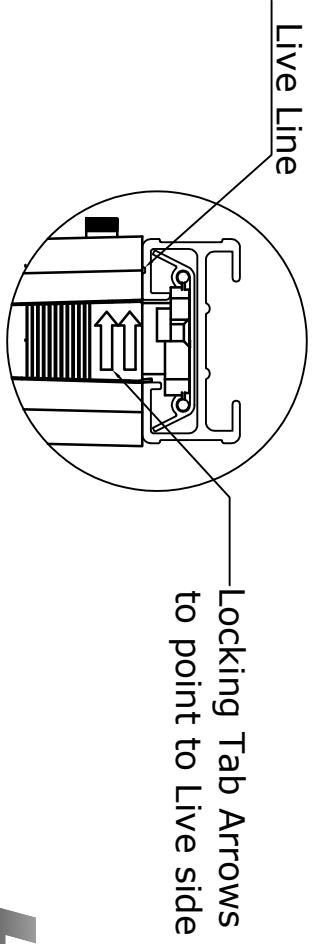