

Installation Sheet KSR6435/37/45/46

Escala 3 Circuit Escala III LED Track Fittings

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP20 ⚡ UK CE 0.3m 10w, 30w or 50w LED

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to the KSR Escala 3 circuit track system only. Any faulty, broken or damaged luminaires should be replaced immediately.




KSR will not accept responsibility for any claims arising from a poor installation.
Please Note: The limited warranty shall be deemed null and void in the following circumstances:
Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature (normal operating ambient temperature -20 ~ +40°C), humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice


Always switch off mains supply before installing or servicing.
This luminaire is suitable for indoor use only and should not be fitted to damp or wet surfaces such as freshly plastered or painted ceilings. IP40 rated when installed from the front face only.
Do not use Megger or similar high voltage instruments. Due to the fact this luminaire contains electronic components that may be damaged by high test voltages, they must be disconnected from the circuit before testing.
To prevent damage to the driver, do not mix with conventional magnetic ballasts on the same electrical circuit.
At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

Installation Procedure

Familiarise yourself with the way the luminaire connector connects to track.
See Fig. 1 Please note the lever needs to be in this position to fit track.
Move the lever clockwise as show in Fig.2 locking fitting to track.
Then turn dial to select required circuit. See Fig.3 for dial positions.
Adjust beam aim by turning and tilting head of luminaire.
Turn on the mains supply and ensure the luminaire is working correctly.

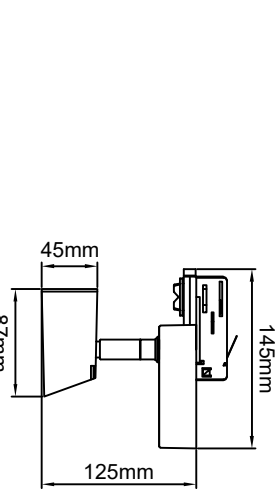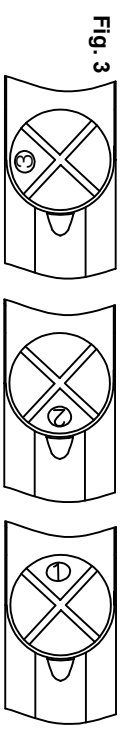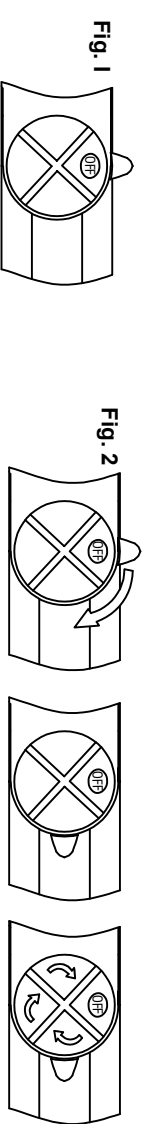

KSR6435 & KSR6437

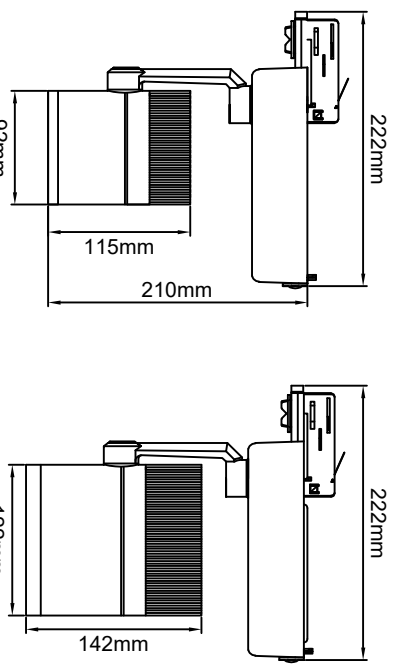

KSR6445

KSR6446

Product Code	Wattage	Colour	Beam Angle	CRI	Lumen Output
KSR6435	10w	3000K	38°	90	650
KSR6436	10w	5000K	38°	80	800
KSR6445	30w	4000K	40°	90	1900
KSR6446	50w	4000K	40°	90	3200

The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced



KSR Lighting Aftersales: 023 92 674343
E-mail: aftersales@ksrlighting.com