

Available finish: White

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP20 240VAC~50Hz 5W/10W

These fittings are Class I and must be Earthed

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply.

Any faulty, broken or damaged luminaires should be replaced immediately.

KSR will not accept responsibility for any claims arising from a poor installation.

Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature, humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice

Always switch off mains supply before servicing.

This luminaire is suitable for indoor use only and should not be fitted to damp or wet surfaces such as freshly plastered or painted walls.

Do not use Megger or similar high voltage instruments. Due to the fact this luminaire contains electronic components that maybe damaged by high test voltages, they must be disconnected from the circuit before testing.

To prevent damage to the driver, do not mix with conventional magnetic ballasts on the same electrical circuit.

At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

Please note these luminaires are non-dimmable.

Installation Procedure

KSR recommends that you familiarise yourself with the installation. Once you are completely satisfied:

Safely isolate the mains supply.

Locate the area's suitable to install these luminaires.


Remove the retaining grub screws from the side of the wall light holding the back plate to the fitting.

Secure the back plate to a suitable surface, dressing supply cable to ensure it is not snagged on any part of the bracket.


Connect the mains supply to the terminal block following the marking on the base and/or the guide in Fig 1.

Place the fitting back on to the base plate and secure with the grub screw.

Turn on the power and test.

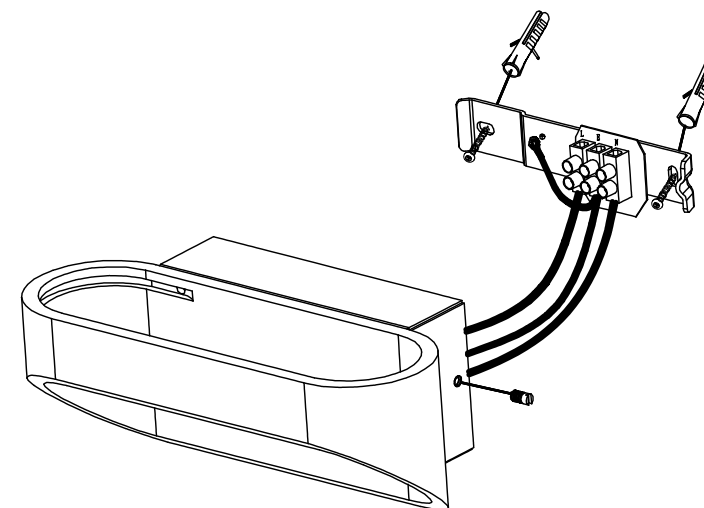

KSR7260



KSR7261

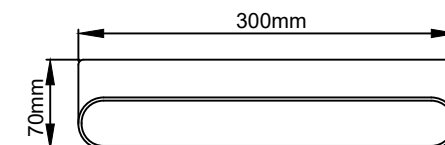

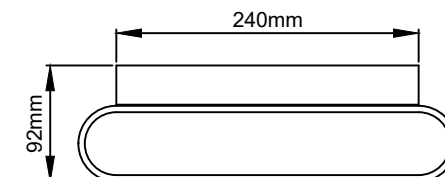


Fig. 1

Luminaire		Mains Supply	
L - Brown		Live	
N - Blue		Neutral	
Green/Yellow		Earth	

	Wattage	Colour	CRI	Lumens	Dimmable
KSR7260	5W	3000K	Ra82	310	No
KSR7261	2x 5W	3000K	Ra82	630	No
The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced					

KSR Lighting Aftersales: 023 92 674343

E-mail: aftersales@ksrlighting.com

