



Available Finish: White/Opal

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP20 240VAC~50Hz 3-15W

This fitting is Class II: Double insulated, No Earth required.

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply.

Any faulty, broken or damaged luminaires should be replaced immediately.

KSR will not accept responsibility for any claims arising from a poor installation.

Please Note: The limited warranty shall be deemed null and void in the following circumstances:

Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature, humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

This luminaire is not suitable for bathroom or areas of high steam or heat.

Important User Advice

Always switch off mains supply before installing or servicing.

This luminaire is suitable for indoor use only and should not be fitted to damp or wet surfaces such as freshly plastered or painted ceilings. IP20 rated when installed from the front face only.

Do not use Megger or similar high voltage instruments. Due to the fact this luminaire contains electronic components that maybe damaged by high test voltages, they must be disconnected from the circuit before testing. To prevent damage to the driver, do not mix with conventional magnetic ballasts on the same electrical circuit. At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

Installation Procedure




Install as below using the fixing clips provided. The cabinet lights can be mounted to illuminate downward or backward depending on requirements.

Connect the driver supplied to mains supply Brown - Live, Blue - Neutral, route cable to KSRCL200 bar (with switch) and plug in.


Up to 5 KSRCL201 bars can be added to extend, using straight connectors or 90° connectors as required.

Switch on and test.


Under Cabinet application

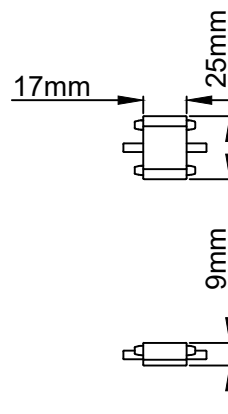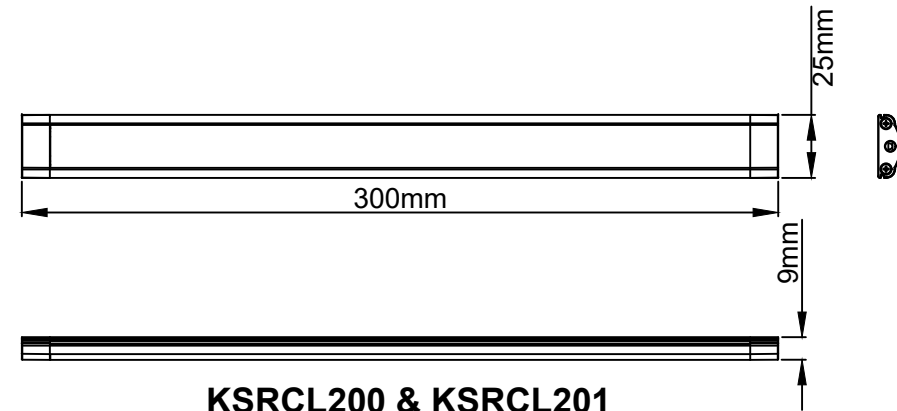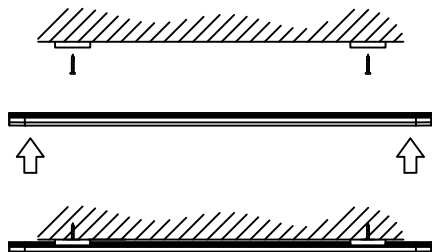

KSRCL202

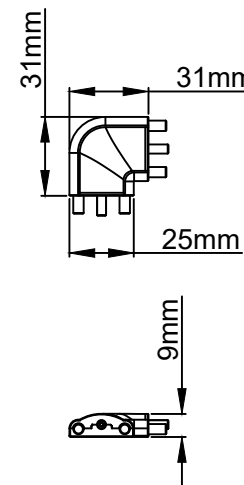

KSRCL203

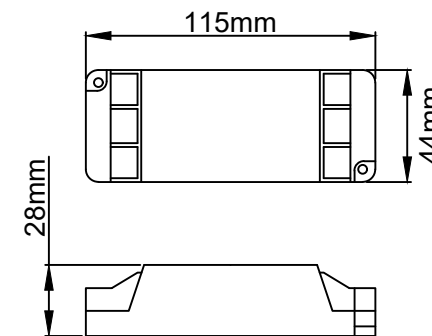

KSRCL200 Driver

Lamp Details

Wattage: 3W Integral LED

Colour: 4000K

Dimmable: No

Replaceable Module: No

Cable Supplied: 2000mm

Driver Supplied: Yes (KSRCL200 ONLY)

The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced

This product contains a light source of energy efficiency class G

KSR Lighting Aftersales: 023 92 674343

E-mail: aftersales@ksrlighting.com

