



# Seron LED Spotlight

*Exterior Recessed Lighting*



Data Sheet

## Product Information

Seron LED Spotlights are ideal for lighting wall perimeters for Pathways, feature lighting and wall washing applications.

Available with an optional Visor attachment to help control the direction of the light source.

## Product Features

- 2 year warranty
- IP65
- Class I
- 7w 4000K LED
- Non-Dimmable
- Pre-wired with 500mm of Flex
- Up to 30,000hr Life Expectancy



# Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	Energy Efficiency Class	Protection Class
KSR1325	Seron 7w LED 4000K LED Spike Light	7	4000	503	A+	I
KSR1326	Seron Visor Only for KSR1325					

Nominal voltage	220-240VAC
Operating frequency	50Hz
Circuit Wattage	7w including losses
Circuit Current	0.019 A
Driver Current rating	210mA
PFC	0.60
In Rush Current	0.25 A Max Peak
Ambient temperature range	-10°C~+30°C
Start time	< 0.5 sec
IP rating	65

## Construction

Body:	Cast Aluminium
Lens:	Transparent Glass

## Standards


BSEN60598-1:2015      Luminaires – Part 1: General requirements and tests

## In Conformity with


LVD	Low voltage directive 2014/35/EU
EMC	Electromagnetic compatibility directive 2014/30/EU
ERP	Energy related products directive 2009/125/EC
RoHS	Restriction of hazardous substances 2011/65/EU

# Product Dimensions

## KSR1325

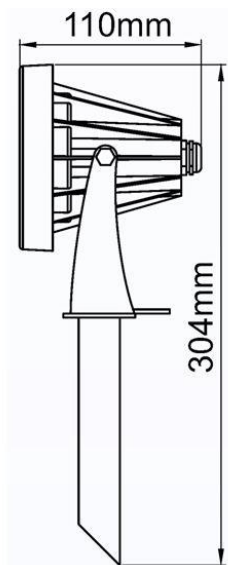

## KSR1325 with KSR1326

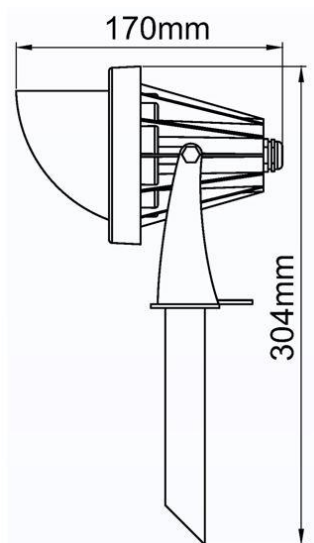

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.