



Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP20 240V~50/60Hz 2x5W LED

These fittings are Class I and must be Earthed

### Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50/60Hz supply.

Any faulty, broken or damaged luminaires should be replaced immediately.

KSR will not accept responsibility for any claims arising from a poor installation.

Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

### Important User Advice

Always safely isolate mains supply before fitting/servicing.

This luminaire is suitable for indoor use only and should not be fitted to damp or wet surfaces such as freshly plastered or painted walls.

At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

### Installation Procedure

Familiarize yourself with the luminaire and ensure the power is safely isolated before installing.

Remove the fixing bracket by removing and retaining the 2 screws on the side of the base.

Mark the position of the fixings on the wall, avoiding any wiring in the wall.

Mount wall bracket using suitable fixings for the substrate ensuring the bracket is level before proceeding to next step.

Open terminal block casing.

Support luminaire whilst making connections. Always avoid straining cables.

Prepare supply cables as follows:

Remove 6mm of insulation from the L / N / E connections.

Connect as per Fig 1 - supply (L) Brown to the Brown lead, connect the Neutral (N) Blue to the Blue lead and connect the Earth (E) Green/Yellow to the Green/Yellow lead as per the terminal block.

When carrying out the connection procedure always ensure all termination screws are fully tightened and no loose strands of wire are present.

Snap shut terminal block casing.

Secure the luminaire to the wall bracket using the 2 screws retained ensuring not to damage or trap any of the wiring or leave any wires exposed.

Turn on power to test luminaire.


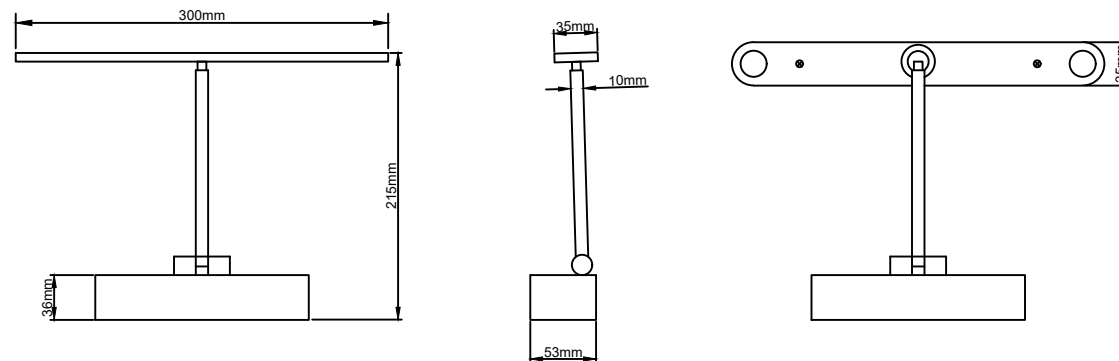


Fig. 1

### Wiring Details ( Class I )

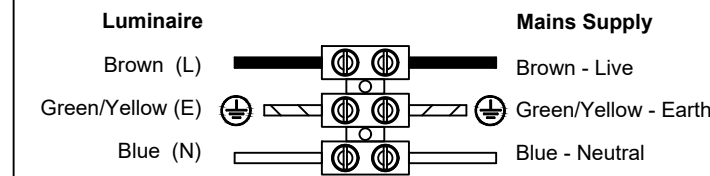

### Lamp Details

Product Code	Description	Power	CRI	Lumen Output
KSR7266	Boston LED 300mm Picture Light	2x5W	>Ra94	553

**The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced**

*This product contains a light source of energy efficiency class G*

