

Available finish:- Black

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP65 IK10     240V~50Hz 46W max.

KSR Lighting Ltd, Optimum House, Beeding Close, Southern Cross Trading Estate,
Bognor Regis, West Sussex, PO22 9TS.

These fittings are Class II and do not require an Earth

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply.

Any faulty, broken or damaged luminaires should be replaced immediately.

KSR will not accept responsibility for any claims arising from a poor installation.

Please Note: The limited warranty shall be deemed nul and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature (normal operating ambient temperature -15 - 40°C), humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice

Always switch off mains supply before servicing.

This luminaire is suitable for exterior use, KSR recommends an atleast quarterly cleaning schedule to preserve product finish and lumen output. Do not use Megger or similar high voltage instruments. Due to the fact this luminaire contains electronic components that maybe damaged by high test voltages, they must be disconnected from the circuit before testing.

To prevent damage to the driver, do not mix with conventional magnetic ballasts on the same electrical circuit.

At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

Installation Procedure

Safely isolate the mains supply before installation.

Remove the head by loosening the grub screw and twisting anticlockwise.

Route the cable through the cable gland (8mm-12mm) and terminate wiring as per Figure 1.

Install suitable lamp not exceeding the maximum wattage.



Refit the head in reverse of removal ensuring the seal is clean, in place and undamaged, grease the grub screw and tighten.

Tighten the cable gland ensuring a water tight connection.


Secure the bollard in place using suitable fixings for the application.

Turn mains supply on and test luminaire.

Never touch a hot lamp.

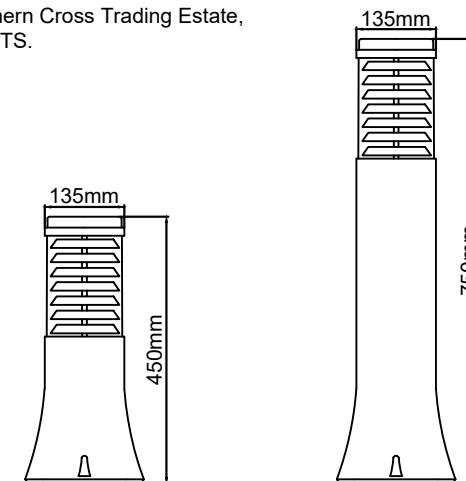


KSR1180




KSR1181

Fig.1

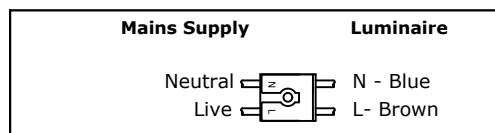

Lamp Details

Lamp Cap: E27 GLS
Wattage: 46W (max)



KSR Lighting recommend only branded lamps
For example: Sylvania, GE, Philips or Osram

KSR Lighting Aftersales: 023 92 674343

E-mail: aftersales@ksrlighting.com