

Tulua III LED PIR

Exterior Wall Lighting



Data Sheet

Product Information

The Tulua III LED PIR wall light is perfect for up/down lighting external walls with the added security feature of an integrated PIR sensor.

Made of 304 grade stainless steel which is ideal for most areas.

Product Features

- 2 year warranty
- Class I
- IP44
- 5w 3000K LED
- CRI: Ra80
- Not suitable for high saline areas

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	PIR Viewing Angle	Energy Efficiency Class	Protection Class
KSR1318	Tulua III 2x 5w 3000K LED Up & Down Wall Light with PIR Sensor	2x 5w	3000	650	80	110°	A+	I

Nominal voltage	220~240VAC
Operating frequency	50Hz
Circuit Wattage	10w
Circuit Current	0.025A
Driver mA Rating	210mA
PFC	0.6
In Rush Current	0.45A Max Peak
Ambient temperature range	-10°C to +30°C
Start time	< 0.5 sec
IP rating	44

PIR Parameters

PIR Range	9m Max Mounted at 4m
Detection Angle	110°
Time Adjust	12 seconds to 4 minutes
Lux Control	Min 9lux

Construction

Body:	304 Stainless Steel
Lens:	Glass


Standards

BSEN60598-1:2015 Luminaires – Part 1: General requirements and tests

In Conformity with

LVD	Low voltage directive 2014/35/EU
EMC	Electromagnetic compatibility directive 2014/30/EU
ERP	Energy related products directive 2009/125/EC
RoHS	Restriction of hazardous substances 2011/65/EU

Product Dimensions

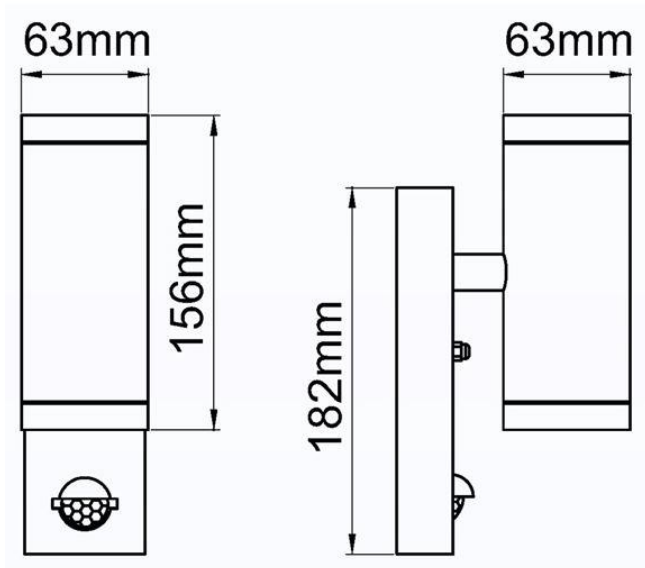

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.