



Available finish:- 316L Stainless Steel

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP67 240VAC~50Hz 10x 0.5W

These fittings are Class II and do not require an Earth connection

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply.

Any faulty, broken or damaged luminaires should be replaced immediately.

KSR will not accept responsibility for any claims arising from a poor installation.

Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature (normal operating ambient temperature -20 ~ +40°C), humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

General Maintenance

These products are suitable for external use, general maintenance and cleaning should be performed at least quarterly. Clean product outer using a damp cloth, do not use abrasive cleaners as this may damage the finish. After any maintenance, remember to check all seals are intact. Always switch off mains supply before servicing.

Do not use Megger or similar high voltage instruments. Due to the fact this luminaire contains electronic components that maybe damaged by high test voltages, they must be disconnected from the circuit before testing.

To prevent damage to the driver, do not mix with conventional magnetic ballasts on the same electrical circuit.

At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

Installation Procedure

Familiarize yourself with the luminaire and ensure the power is turned off before installing.

We recommend drilling a hole in a scrap piece of material before installing.

This kit is only suitable for decking installations.

Take time to check all factory glands are tight and seals are in place.

This kit is a plug and play system, cable should not be cut as this will invalidate the warranty.

Dress the main link cable under decking positioning each socket where the light will be installed.

Drill a 25mm hole in the decking and feed the plug through the hole and connect to main link cable, tighten locking ring.





Dress any excess cable through the hole and push the fitting into place.

Connect the mains supply. Ensure a suitable IP rated socket/connector is used.

These fittings are not suitable for ceiling/soffit applications and should only be installed as uplights.

It is not recommended to install this kit into composite decking - for more information on this please contact your composite decking supplier.

ØCut-Out

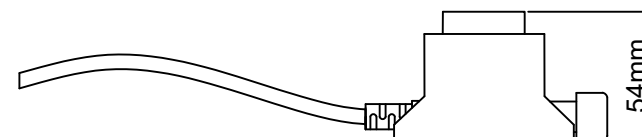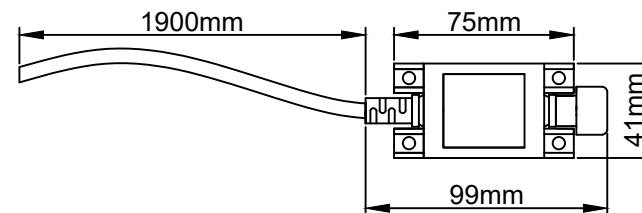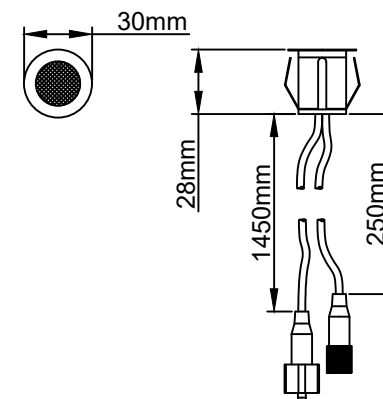

Lamp Details



KSR1333 - 10 x 0.5W Integral LED Module
KSR1333W/W - 3000K Warm White
KSR1333C/W - 6000K Cool White

The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced

This product contains a light source of energy efficiency class G



KSR Lighting Aftersales: 023 92 674343

E-mail: aftersales@ksrlighting.com