




Read these instructions before commencing installation & retain them for future reference.

IP65    240V 10W

These fittings are Class II and do not require an Earth connection

Important Information

It is recommended that luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V 50Hz supply. Any broken or damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a poor installation.

General Maintenance

General maintenance and cleaning should be performed at least annually. Clean product outer using a damp cloth, dried and buffed to a shine. Do not use abrasive cleaners on this product.

Installation Procedure




Familiarize yourself with the wall light and ensure the mains supply is turned off prior to installing this luminaire.
Remove the four screws that secure the mounting plate to the wall light. Take note that there is a space to dress supply cable at the bottom of the mounting box.
Offer the base plate up to a suitable surface and mark the two fixing points, ensuring the cable entry is at the bottom of the plate.
Once drilled, secure the plate to the wall.
Remove the terminal block cover and slide over the mains cable.
Terminate the fixed wiring into the terminal block, following the guide below and/or the markings on the fitting.
Replace the terminal block cover ensuring it sits on the seal correctly.
Offer the luminaire up to the mounting bracket and replace the four fixing screws.
Turn on the power and test the luminaire.
If using the KSR1172 PIR model, set the 'on' time and 'Lux' (Daylight level) as requested.

STEP DIM PIR:


This PIR will bring the light on at 100% when activated by movement, when it times out the output will switch down to around 25% and remain at this level until movement is detected.



Available finish:- Black

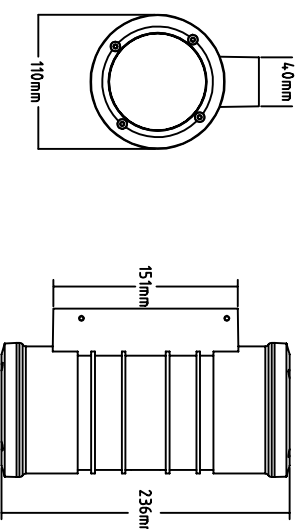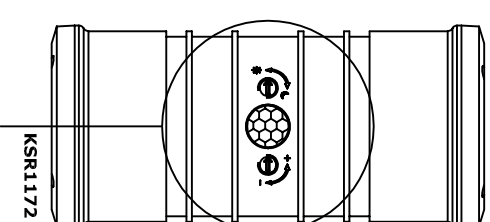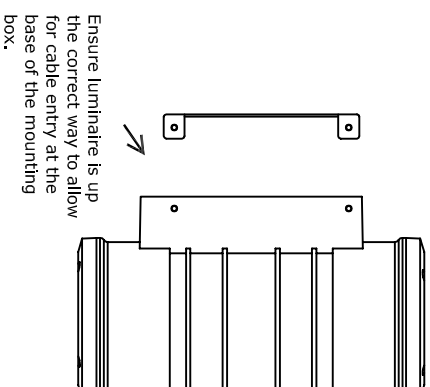

KSR
LIGHTING



Lux Control:
Anti Clockwise-
For daytime use.
Clockwise-
For evening/night use.

Time Control:
Anti Clockwise-
Max 'ON' time 5 Minutes.
Clockwise-
Min 'ON' time 5 Seconds

Mains Supply

Live - Brown  L- Brown
Neutral - Blue  N - Blue

Luminaire

Lamp Details

LED 10W (5W up - 5W down)
4000K Neutral White
Non Replaceable LED Module
900 Lumens (450 up - 450 down)

KSR Lighting After-sales: 023 92 674343
E-mail: info@ksr-lighting.co.uk