

# Villas

*Exterior Recessed Lighting*



Data Sheet

## Product Information

The Villas LED recessed ground/wall lights are ideal for perimeter marker lighting. Comes with a 2 year warranty for your peace of mind.

## Product Features

- 2 year warranty
- Class I
- IP65
- Instant on
- 4000K LED
- 60 Lumens
- CRI: Ra80
- Non dimmable
- Integral driver
- Can be wall or ground recessed
- Comes with eyelid single output cover as standard with optional 2 way, 4 way or 8 way cover available to order



KSR1365

# Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	Energy Efficiency Class	Protection Class
KSR1365	Villas 5W LED Eyelid Ground/Wall Light Anthracite	5	3000	158	A	I
KSR1366	Villas 2 Way Cover Only	N/A	N/A	N/A	N/A	N/A
KSR1367	Villas 4 Way Cover Only	N/A	N/A	N/A	N/A	N/A
KSR1368	Villas 8 Way Cover Only	N/A	N/A	N/A	N/A	N/A

Nominal voltage	220~240VAC
Operating frequency	50-60Hz
Ambient temperature range	-20°C~+40°C
Start time	< 0.5 sec
IP rating	65

## Construction

Body:	Aluminium
Lens:	Glass

## Standards


BSEN60598-1:2015      Luminaires – Part 1: General requirements and tests

## In Conformity with


LVD	Low voltage directive 2014/35/EU
EMC	Electromagnetic compatibility directive 2014/30/EU
ERP	Energy related products directive 2009/125/EC
RoHS	Restriction of hazardous substances 2011/65/EU

# Product Dimensions


91-97mm

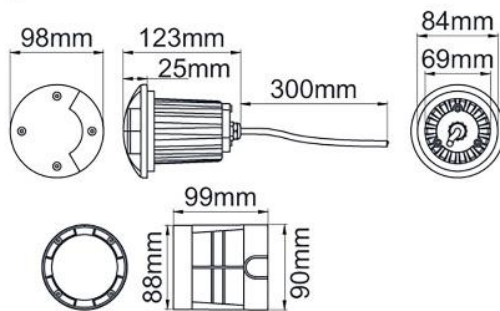


**KSR1365**



**KSR1366**



**KSR1367**



**KSR1368**

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.