



Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP55     240V/AC~50Hz 2x 50W Max.

These fittings are Class I and must be Earthed

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply.

Any faulty, broken or damaged luminaires should be replaced immediately.

KSR will not accept responsibility for any claims arising from a poor installation.

Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature, humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice

Always switch off mains supply before servicing.

KSR recommend greasing all threaded parts and cleaning the body every 3 months minimum.

At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

Installation Procedure

Familiarize yourself with the luminaire/installation procedure and ensure the power is safely isolated before installing the luminaire.

Remove the four retaining screws from the base of the wall light holding the back plate to the fitting.







Secure the back plate to a suitable surface, dressing supply cable through the supplied blank grommet. Ensuring the cable entry is at the bottom with the wiring terminals at the top.

Wire the mains supply to the terminal block following the marking on the base and/or the guide in Fig 1 as below.

Place the fitting back on to the base plate and secure with the four fixings, cover the screw heads with the 4 silver caps provided.




Insert a lamp, turn on the power and test.

Note: do not over tighten the glass lenses when installing the lamp as this may distort the seals and cause moisture ingress.

Mains Supply	Luminaire
Live - Brown 	L - Brown 
Earth - Green/Yellow 	- Green/Yellow 
Neutral - Blue 	N - Blue 


Available Finishes: Anthracite (KSR7108/7109/7112) , Silver (KSR7100/7101)

Rusty Brown (KSR7177/7178)

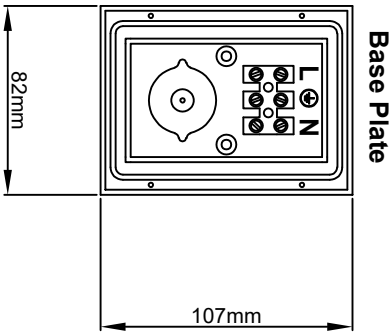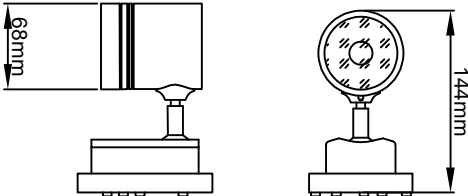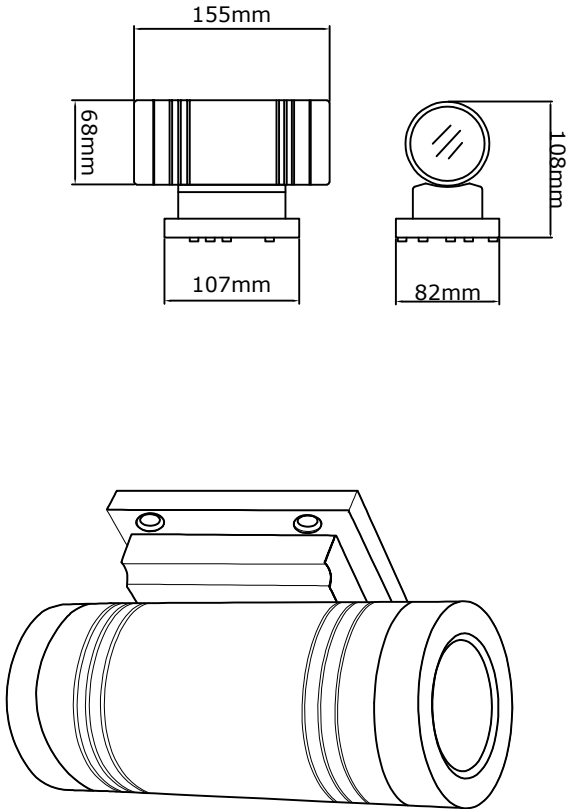

**Lamp Details**

Lamp Cap: GU10  
Max Wattage: 50W



Suitable for Retrofit LED Lamps

KSR Lighting Aftersales: 023 92 674343  
E-mail: [aftersales@ksrlighting.com](mailto:aftersales@ksrlighting.com)

