

Installation Sheet

KSR1334RGB

Read these instructions before commencing installation & retain them for future reference.

IP65   240VAC~50HZ 10x 0.4W

These fittings are Class II and do not require an Earth connection

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply.

Any faulty, broken or damaged luminaires should be replaced immediately.

KSR will not accept responsibility for any claims arising from a poor installation.

Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature (normal operating ambient temperature -15 - 35°C), humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice

Always switch off mains supply before servicing.

This luminaire is suitable for exterior use, KSR recommends an atleast quarterly cleaning schedule to preserve product finish and lumen output. Do not use Megger or similar high voltage instruments. Due to the fact this luminaire contains electronic components that maybe damaged by high test voltages, they must be disconnected from the circuit before testing.

At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation. This LED kit uses RF Signal to control the lighting, if the remote stops working check the battery before investigating the other components.

Please note the RF Remote Control is only rated as IP20.

Installation Procedure

Familiarize yourself with the luminaire and ensure the power is turned off before installing.

We recommend drilling a hole in a scrap piece of material before installing.

This kit is only suitable for decking installations.

Take time to check all factory glands are tight and seals are in place.

This kit is a plug and play system, the plug and play cables should not be cut as this will invalidate the warranty.

Dress the main link cable under decking positioning each socket where the light will be installed.

Drill a 38mm hole in the decking and feed the plug through the hole and connect to main link cable, tighten locking ring.

Dress any excess cable through the hole and push the fitting into place.

Connect the mains supply, ensuring a suitable IP rated socket/connector is used where applicable.

These fittings are not suitable for ceiling/soffit applications and should only be installed as uplights. It is not recommended to install this kit into composite decking



Cabello




10x 0.4W LED Deck Light Kit

Available finish:- Stainless Steel





ØCut-Out



38mm



45mm

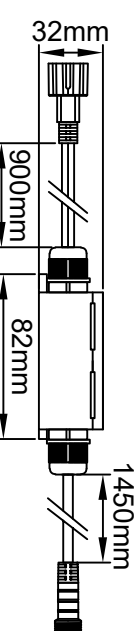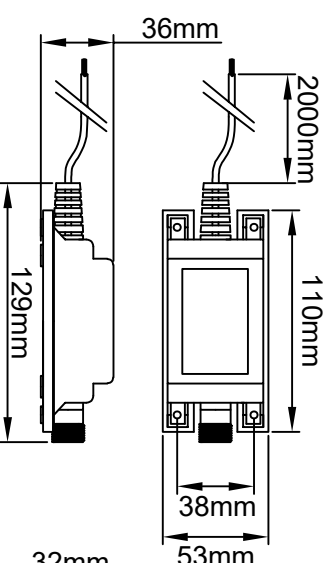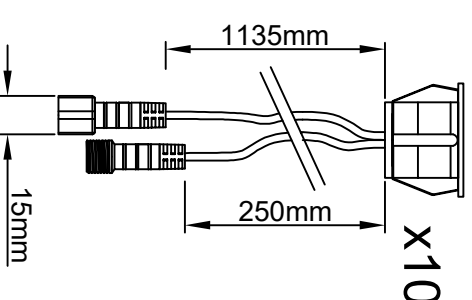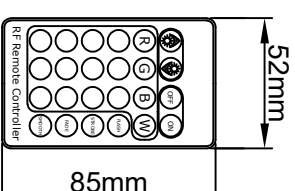

Lamp Details

KSR1334RGB - 10 x 0.4W Integral LED Module, Per Head
Non Replaceable

KSR Lighting Aftersales: 023 92 674343
E-mail: aftersales@ksrlighting.com

KSR
LIGHTING

KSR Lighting Ltd, Unit E Hazleton Interchange, Lakesmere Road, Horndean, Hampshire, PO8 9JU