



Available Finish: Anthracite

**Read these instructions before commencing installation & retain them for future reference.**

**IP65** **240V 5W**

### Important Information

It is recommended that luminaires are installed by a qualified electrician ensuring the installation complies to current IEE wiring regulations & local building control. These products are designed for connection to a 230-240V mains supply. Any broken or damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a poor installation.


### Important User Advice

Always switch off mains supply before installing/servicing.  
A periodic cleaning schedule should be maintained to ensure the life of the finish this is at the customers discretion and location of install (We recommend that you do not install a painted finish in very high saline areas).  
Always use a suitable water repellent (grease) on bolts/screws to ensure trouble free maintenance.


### Installation Procedure

KSR recommends that you familiarise yourself with the installation. Once you are satisfied:  
Ensure mains supply is turned off.  
Drill/cut a 91-97mm hole and cement the plastic retainer into place or build in ensuring the front is flush with the finished wall/ground.  
Never fit the luminaire into the back box until the concrete/cement/plaster/render is fully dry.  
If installing in the ground we recommend that a minimum of 300mm shingle for drainage is used under the fitting and that it is not installed where water can puddle.  
Terminate the wiring using a suitable IP rated connector for the installation, (Brown - Live, Blue - Neutral and Green/Yellow - Earth).  
Remove the retaining hex bolts, cover and glass.  
Install the luminaire into the back box and secure using the supplied screws.  
Re-install the glass ensuring the seal is in place and then either the supplied cover or one of the optional covers available to purchase separately.  
Grease and re-install the four hex bolts and tighten as per Fig.1 a quarter turn on each bolt until tight, do not over tighten.  
Turn on mains supply and test.


### Optional Covers




**KSR1368**




**KSR1367**



**KSR1366**

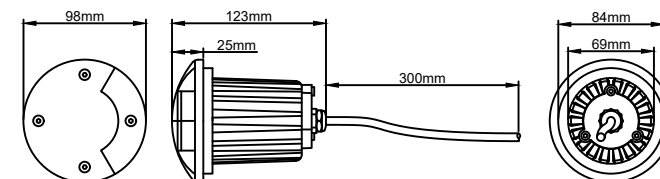


**KSR1365**

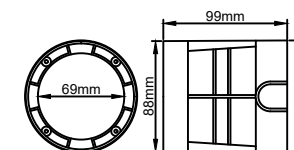

**Back Box**

**Fig.1**



### Lamp Details

Lamp Cap: Non-replaceable LED  
Lamp Colour: 4000K  
CRI: Ra80  
Wattage: 5W



KSR Lighting Aftersales: 023 92 674343  
E-mail: [aftersales@ksrlighting.com](mailto:aftersales@ksrlighting.com)