

# Mira 220 Ground Light

Exterior Recessed Lighting




## **Product Information**

Mira 220 LED IP67 Ground lights are ideal for lighting wall perimeters for Pathways, stairways and Driveway areas.

With 3 Beam Angle options and 2 colour temperature options this ground uplighter offers an effective Solution.

Comes with a 2 year warranty for your peace of mind.

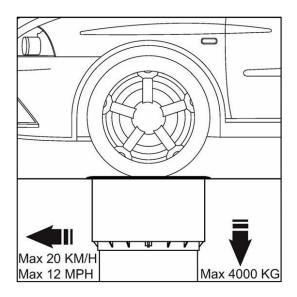

#### **Product Features**

- 2 year warranty
- IP67/IK10
- Class I
- 20w 3000K/4000K LED
- CRI: Ra80
- Pre-wired with 2m Flex
- Asymmetric lens option for wall washing
- L70 30,000hrs

#### www.ksrlighting.com

# **Product Specification**

Product Code	Product Description	Wattage (W)	ССТ (К)	Lumens (Im)	Energy Efficiency Class 2021	Protection Class
KSR3538	Mira 220 20w 4000K LED Ground Light with 60° Beam and 20° Asymmetric Lens	20	4000	2385	D	I
KSR3539	Mira 220 20w 3000K LED Ground Light with 60° Beam and 20° Asymmetric Lens	20	3000	2280	D	I
KSR3540	Mira 220 20w 4000K LED Ground Light with 50° Beam	20	4000	2385	D	I
KSR3541	Mira 220 20w 3000K LED Ground Light with 50° Beam	20	3000	2280	D	I
KSR3542	Mira 220 20w 4000K LED Ground Light with 15° Beam	20	4000	2385	D	I
KSR3543	Mira 220 20w 3000K LED Ground Light with 15° Beam	20	3000	2280	D	I

Operating frequency50/60HzCircuit Wattage20w including lossesCircuit Current0.10ADriver Current rating350mAPFC0.85In Rush Current0.45A Max PeakAmbient temperature range-10°c~+30°cStart time<0.5 sec	Nominal voltage	220-240VAC
Circuit Current 0.10A   Driver Current rating 350mA   PFC 0.85   In Rush Current 0.45A Max Peak   Ambient temperature range -10°c~+30°c   Start time < 0.5 sec	Operating frequency	50/60Hz
Driver Current rating350mAPFC0.85In Rush Current0.45A Max PeakAmbient temperature range-10°c~+30°cStart time< 0.5 sec	Circuit Wattage	20w including losses
PFC 0.85   In Rush Current 0.45A Max Peak   Ambient temperature range -10°c~+30°c   Start time < 0.5 sec	Circuit Current	0.10A
In Rush Current0.45A Max PeakAmbient temperature range-10°c~+30°cStart time< 0.5 sec	Driver Current rating	350mA
Ambient temperature range-10°c~+30°cStart time< 0.5 sec	PFC	0.85
Start time < 0.5 sec	In Rush Current	0.45A Max Peak
	Ambient temperature range	-10°c~+30°c
IP rating 67	Start time	< 0.5 sec
	IP rating	67

### Construction

Body:	Extruded Aluminium
Rim:	AISI 316L Stainless Steel
Diffuser:	Transparent Glass

## **Standards**


BSEN60598-1:2021 Luminaires – Part 1: General requirements and tests

## In Conformity with

Low voltage directive 2014/35/EU
Electromagnetic compatibility directive 2014/30/EU
Energy related products directive 2019/2020/EU
Restriction of hazardous substances 2015/863/EU

#### www.ksrlighting.com

## **Product Dimensions**

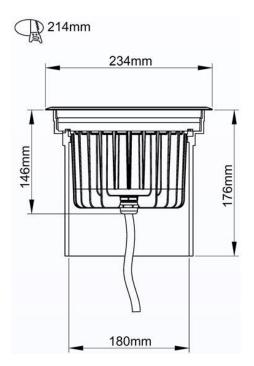

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitte

#### www.ksrlighting.com