

# Meridian II Range

External Wall Lights



Data Sheet

## Product Information

The Meridian II range consists of 2 Wall lights that are designed complement each other, with its half-moon design and Up/Down illumination this fitting is ideal for applications where a decorative approach is preferred.

Complete with a 5 year warranty.

## Product Features

- 5 year warranty
- IP65 Wall Lights
- Class II
- CoB LED technology
- 3000K and 4000K Options
- High CRI of >ra84
- Available in two finishes Anthracite and Bronze
- L70 – 40,000hrs

# Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class 2021	Protection Class
KSR4120	Meridian 2.1 15W 3000K Wall Anthracite	15	3000	1202	82	G	II
KSR4121	Meridian 2.1 15W 3000K Wall Bronze	15	3000	1202	82	G	II
KSR4122	Meridian 2.1 15W 4000K Wall Anthracite	15	4000	1192	84	G	II
KSR4123	Meridian 2.1 15W 4000K Wall Bronze	15	4000	1192	84	G	II
KSR4124	Meridian 2.2 15W 3000K Wall Anthracite	15	3000	1194	82	G	II
KSR4125	Meridian 2.2 15W 3000K Wall Bronze	15	3000	1194	82	G	II
KSR4126	Meridian 2.2 15W 4000K Wall Anthracite	15	4000	1204	84	G	II
KSR4127	Meridian 2.2 15W 4000K Wall Bronze	15	4000	1204	84	G	II

Technical Data	Meridian 2.1	Meridian 2.2
Nominal voltage	220-240VAC	220-240VAC
Operating frequency	50/60Hz	50/60Hz
Circuit Wattage	18.7w including losses	18.3w including losses
Circuit Current	0.08A	0.08A
Driver Current rating	N/A	N/A
PFC	0.95	0.95
In Rush Current	TBC	TBC
Ambient temperature range	-10°C~+30°C	-10°C~+30°C
Start time	< 0.5 sec	< 0.5 sec
IP rating	65	65

## Construction

Body: Die cast Aluminium  
Diffuser: Glass

## Standards


BSEN60598-1:2021      Luminaires – Part 1: General requirements and tests

## In Conformity with


LVD      Low voltage directive 2014/35/EU  
EMC      Electromagnetic compatibility directive 2014/30/EU  
ERP      Energy related products directive 2019/2020/EU  
RoHS      Restriction of hazardous substances 2015/863/EU

# Product Dimensions

## KSR4120-23

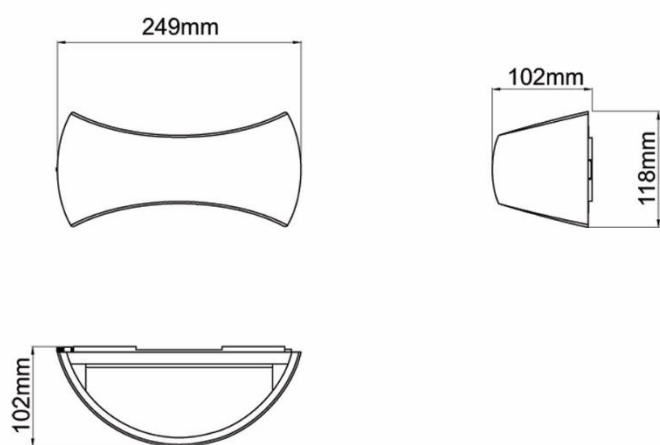

## KSR4124-27

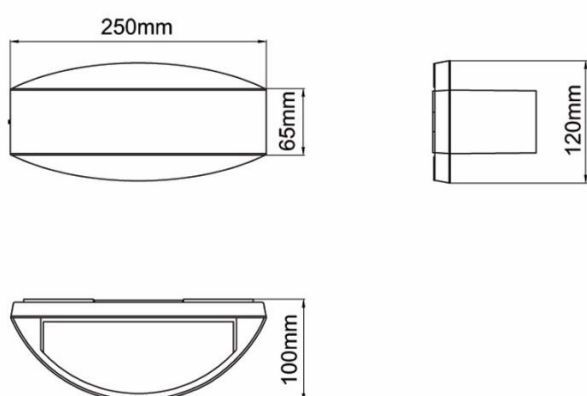

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.