

Installation Sheet

KSR1310-1311

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP65  0.3m  240VAC~50Hz 2x 35W Max.

These fittings are Class I and must be Earthed

Important Information


It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply. Any faulty, broken or damaged luminaires should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature, humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice

Always switch off mains supply before servicing.
KSR recommend greasing all threaded parts and cleaning the body every 3 months minimum.
At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

Installation Procedure

Familiarize yourself with the luminaire/installation procedure and ensure the power is safely isolated before installing the luminaire.
The pre-wired connector can be found in the post of the fitting.
Remove the connector cover by taking out the four screws ensuring you retain the top and seal.
Connect to the mains supply (KSR recommend for external use with larger cables that you use a suitably IP rated connector)
Re-attach the top of the connector ensuring the seal is in place.
Secure the base in position using suitable fixings for the substrate.
Unscrew the lamp cap (anti-clockwise), fit lamp (maximum 35W) and re-fit lamp cap ensuring that the seal is in place.
Turn on mains supply and test luminaire.

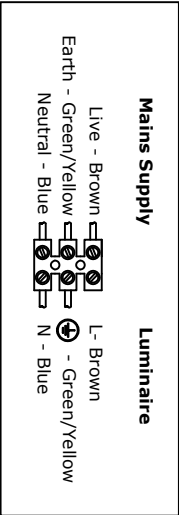


Tulua GU10



GU10 Stainless Steel Floor Lamp


Available Finishes: 316 Stainless Steel

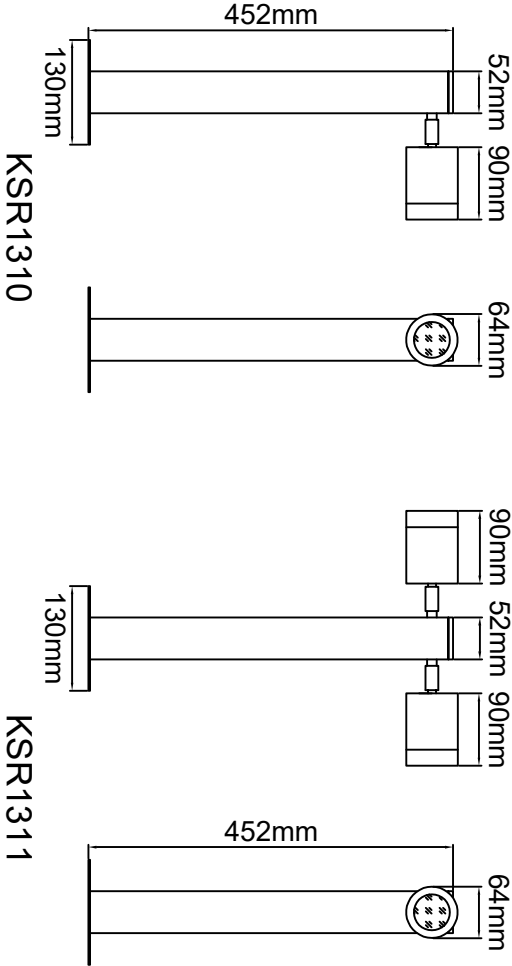

Lamp Details

Lamp Cap: GU10
Max Wattage: 2x35W

Suitable for Retrofit LED Lamps





KSR Lighting Aftersales: 023 92 674343
E-mail: aftersales@ksrlighting.com