Installation Sheet) KSR1344

Tulua ((i)) GU10 Black Range

Available finish:- Black

109mm

64mm

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintainence.



These fittings are Class I and must be Earthed

Important Information

control. These products are designed for connection to a 240V~50Hz supply. ensuring the installation complies with current IEE wiring regulations & local building Any faulty, broken or damaged luminaires should be replaced immediately It is recommended that these luminaires are installed and fitted by a qualified electrician

KSR will not accept responsibility for any claims arising from a poor installation.


damage, adverse temperature (normal operating ambient temperature -20 \sim +40°C), humidity conditions Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the of the products or parts. fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation installer, end user or any third party to exercise caution to protect any covered product or part from outside

General Maintenance

Do not use Megger or similar high voltage instruments. Due to the fact this luminaire contains electronic components maintenance, remember to check all seals are intact. Always switch off mains supply before servicing At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in Clean product outer using a damp cloth, do not use abrasive cleaners as this may damage the finish. After any accordance with local legislation. that maybe damaged by high test voltages, they must be disconnected from the circuit before testing These products are suitable for external use, general maintenance and cleaning should be performed at least quarterly. To prevent damage to the driver, do not mix with conventional magnetic ballasts on the same electrical circuit

Installation Procedure

Ensure mains supply is turned off. Connect to the mains supply using a suitable waterproof lamp cap (anti-clockwise) fit lamp (maximum 35W) if using GU10 LED lamps please check with that the seal is in place. Turn on mains supply and test luminaire. the manufacturer that they are suitable for use in enclosed luminaires. Re-fit lamp cap ensuring connector. Please note the pre-wired cable is not suitable for burying in the ground. Unscrew the

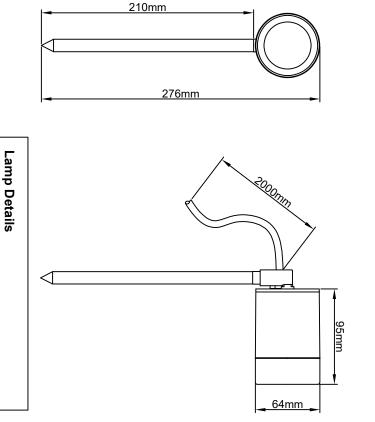



Suitable for Retrofit LED Lamps

Lamp Cap: GU10 Max Wattage: 35W

