## Installation Sheet ) KSR6530-6531



# Escala Pro ( 📳 ) 20W LED Adjustable Beam Angle Track Fitting

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintainence.

# IP20 🗘 🖨 💃 🕻 € 240VAC~50Hz 20W

#### Important Information

complies to current IEE wiring regulations & local building control. These products are designed for use with the It is recommended that the track system is installed and fitted by a qualified electrician ensuring the installation KSR will not accept responsibility for any claims arising from a sub-standard installation. Escala Pro single circuit track system only. Any damaged parts should be replaced as soon as possible.


### Important User Advice

This product is designed to be used indoors only Always switch off mains supply before installing or servicing


#### Installation Procedure


KSR recommend to insert the luminaire into track with the locking tab opposite the Live side (shown by the line on the track) then turn luminare is located correctly is that the arrows on the locking tab should point towards the Live side of the track (shown by the line on Familiarize yourself with the way the luminaire attaches to the track and ensuring the correct polarity the track) see Fig.2. Make sure the locking tab is located in the locked position. the luminaire clockwise until the locking tab locks into the track, never force the luminaire see Fig. 1. Visual confirmation that the

Rotate the front face of the luminaire between 20° and 45° as required for the application. Adjust the fitting to the desired position, the head section will tilt and rotate, do not force the adjustment past the stopping point




## Available Finishes: White or Black





### KSR6530/KSR6531






	Lamp	Lamp Details		
Product Code	Wattage	CCT	Lumens	CRI Ra:
KSR6530	20W	3000K	1741	>92
KSR6531	20W	4000K	1860	>92

when the light source reaches its end of life the whole luminaire shall be replaced The light source of this luminaire is not replaceable;

KSR Lighting Aftersales: 023 92 674343

E-mail: aftersales@ksrlighting.com

Fig. 2

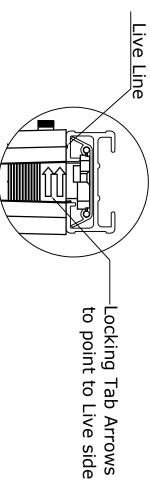

27.08.2021RTG