Installation Sheet KSR6534-6535

Escala Pro

〔 (▮)) 46W LED Adjustable Beam Angle Track Fitting 〕

Available Finishes: White or Black

Read these instructions before commencing installation & retain them for future reference.

IP20 👍 🖶 C€ 240∨ 46W

Important Information

It is recommended that the track system is installed and fitted by a qualified electrician ensuring the installation complies to current IEE wiring regulations & local building control. These products are designed for use with the Escala Pro single circuit track system only. Any damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a sub-standard installation.

Important User Advice


Always switch off mains supply before installing or servicing. This product is designed to be used indoors only.


Installation Procedure

Familiarize yourself with the way the luminaire attaches to the track and ensuring the correct polarity. KSR recommend to insert the luminaire into track with the locking tab opposite the Live side (shown by the line on the track) then turn the luminaire clockwise until the locking tab locks into the track, never force the luminaire see Fig.1. Visual confirmation that the luminare is located correctly is that the arrows on the locking tab should point towards the Live side of the track (shown by the line on the track) see Fig.2. Make sure the locking tab is located in the locked position.

Adjust the fitting to the desired position, the head section will tilt and rotate, do not force the adjustment past the stopping point.

Rotate the front face of the luminaire between 20° and 50° as required for the application.

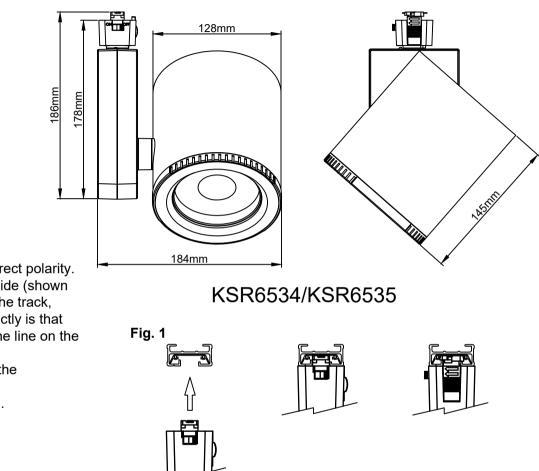

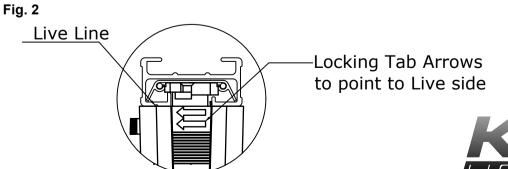

Lamp Details				
Product Code	Wattage	ССТ	Lumens	CRI Ra:
KSR6534	46W	3000K	3800	>90
KSR6535	46W	4000K	4050	>90



KSR Lighting Aftersales: 023 92 674343 E-mail: aftersales@ksrlighting.com

Product Information

07.01.2018MAC