Installation Sheet KSR7267

Read these instructions before commencing installation & retain them for future reference.

IP20⊕ **(**€ 240V 13W

Important Information

It is recommended that luminaires are installed by a qualified electrician. The installation of this product must comply with the current edition of the IEE wiring regulations BS7671.

These products are designed for connection to a 240V 50Hz supply. Any damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a poor installation.

Important User Advice

Always switch off mains supply before installation or servicing.

Installation Details

Remove the retaining grub screws from the side of the wall light holding the back plate to the fitting.

Secure the back plate to a suitable surface, dressing supply cable to ensure it is not snagged on any part of the bracket.

Connect the mains supply to the terminal block following the marking on

the base and/or the guide in Fig 1 as below.

Place the fitting back on to the base plate and secure with the grub screw

Turn on the power and test.

This product features KSRs colour toning technology, when connected to a suitable dimmer the fitting will dim down and tone to a warmer colour temperature. 3000k down to 2000k.

Lamp Details

Mains Supply

Fig. 1

Luminaire

业


L-Brown () Live
N-Blue () Neutral
Green/Yellow () Earth


Light Source: LED Module Wattage: 13W, 546 Lumens 3000k Warm White (Colour Toning) Lamp Included




Scoop ((1)) Wall Light

Dimmable LED Wall Light, White & Alu Finish

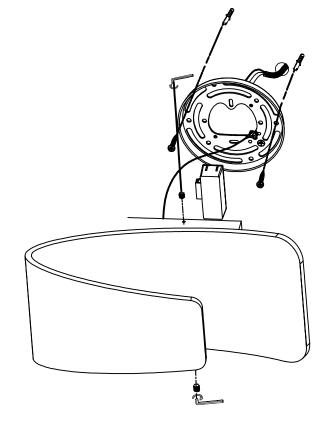





KSR Lighting Aftersales: 023 92 674343 E-mail: info@ksr-lighting.co.uk