

Madrid Wall Light

Exterior Recessed Lighting



Data Sheet

Product Information

The Madrid LED recessed wall lights are ideal for low level recessed wall lighting for illuminating paths, patios, decking, etc.

Comes with a 2 year warranty for your peace of mind.

Product Features

- 2 year warranty
- Class I
- IP44
- Instant on
- 3000K or 4000K LED
- Plain Frame - 138 Lumens
- Grille Frame – 84 Lumens
- Non dimmable integral driver
- L70 – 25,000hrs



KSR1350/1351



KSR1354

Product Specification

| Product Code | Product Description | Wattage (W) | CCT (K) | Lumens (lm) | CRI (Ra) | Energy Efficiency Class | Protection Class |
|--------------|---|-------------|---------|-------------|----------|-------------------------|------------------|
| KSR1350 | Madrid 6W LED Wall Light with Black Plain Frame | 6 | 3000 | 138 | 83 | A | I |
| KSR1351 | Madrid 6W LED Wall Light with Black Plain Frame | 6 | 4000 | 138 | 83 | A | I |
| KSR1352 | Madrid 6W LED Wall Light with Stainless Steel Plain Frame | 6 | 3000 | 138 | 83 | A | I |
| KSR1353 | Madrid 6W LED Wall Light with Stainless Steel Plain Frame | 6 | 4000 | 138 | 83 | A | I |
| KSR1354 | Madrid Black Grille Frame | N/A | N/A | 84 | 83 | N/A | N/A |
| KSR1355 | Madrid Stainless Steel Grille Frame | N/A | N/A | 84 | 83 | N/A | N/A |

| | |
|---------------------------|-------------|
| Nominal voltage | 220~240VAC |
| Operating frequency | 50-60Hz |
| Circuit Power | 0.059A |
| PFC | 0.49 |
| Ambient temperature range | -20°C~+40°C |
| Start time | < 0.5 sec |
| IP rating | 44 |

Construction

Body: Aluminium
Lens: Glass


Standards

BSEN60598-1:2021 Luminaires – Part 1: General requirements and tests


In Conformity with

LVD Low voltage directive 2014/35/EU
EMC Electromagnetic compatibility directive 2014/30/EU
ERP Energy related products directive 2019/2020/EU
RoHS Restriction of hazardous substances 2015/863/EU

Product Dimensions

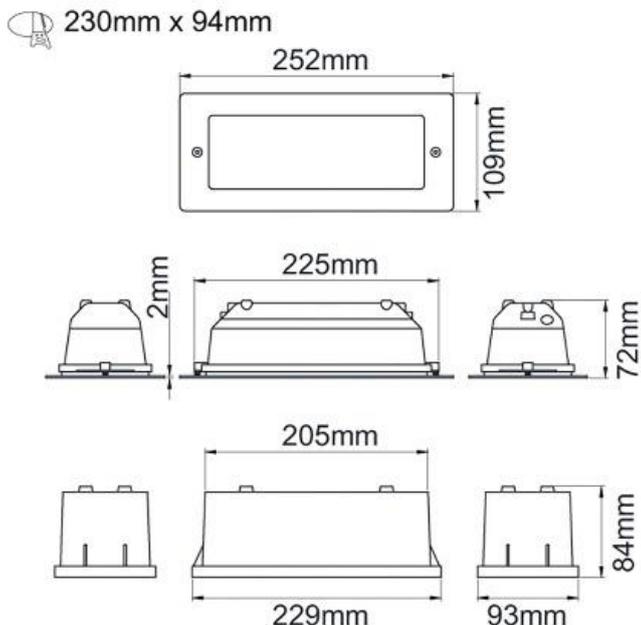

KSR1350-1353



KSR1354-1355

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.