

Utah LED Wall Light

Exterior Wall Lighting



Product Information

The Utah LED wall lights are suitable for highlighting wall features for commercial and domestic applications. Also available are a beam angle plate and blanking plate as an accessory that attaches to the fitting as shown above.

Complete with a 3 year warranty

Product Features

- 3 year warranty
- IP55
- Class I
- Supplied in 3000K as standard
- Strong Cast Aluminium Body
- Available with two beam angle plates
- L70 - 50,000hrs

KSR7167



KSR7167 with KSR7168



KSR7167 with KSR7169



Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class	Protection Class
KSR7167	Utah 6w LED Wall Light	6w	3000	450	82	G	I
Accessories							
KSR7168	Utah Down Plate						
KSR7169	Utah Up Beam						

Nominal voltage	220~240VAC
Operating frequency	50/60Hz
Circuit Wattage	9.8w including driver losses
Circuit Current	0.047A
Driver mA Rating	500mA
PFC	0.9
In Rush Current	0.527A Max Peak
Ambient temperature range	-10°C to +30°C
IP rating	55

Construction

Body: Cast Aluminium


Standards

BSEN60598-1:2021 Luminaires – Part 1: General requirements and tests

In Conformity with

LVD Low voltage directive 2014/35/EU
EMC Electromagnetic compatibility directive 2014/30/EU
ERP Energy related products directive 2019/2020/EU
RoHS Restriction of hazardous substances 2015/863/EU

Product Dimensions

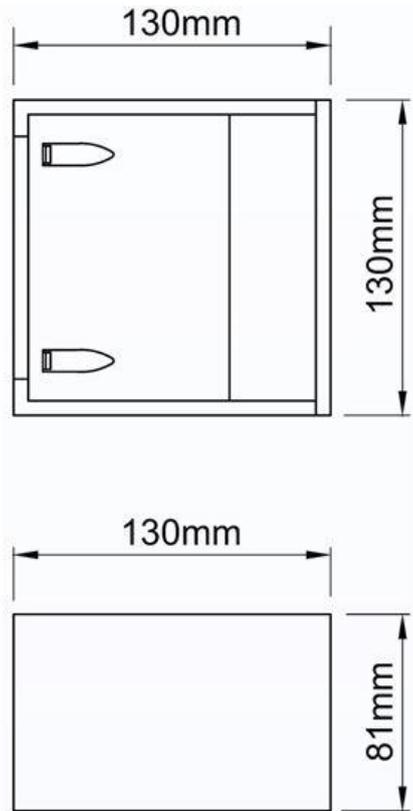

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.